

Name: SCM

Index No.: _____

2705/302 2710/302

Candidate's Signature: _____

2709/302

Date: _____

STRUCTURES III

Oct./Nov. 2015

Time: 3 hours



THE KENYA NATIONAL EXAMINATIONS COUNCIL

**DIPLOMA IN BUILDING TECHNOLOGY
DIPLOMA IN ARCHITECTURE
MODULE III**

STRUCTURES III

3 hours



INSTRUCTIONS TO CANDIDATES

- Write your name and index number in the spaces provided above.*
- Sign and write the date of the examination in the spaces provided above.*
- You should have Mathematical tables/Scientific calculator and drawing instruments for this examination.*
- This paper consists of EIGHT questions.*
- Answer any FIVE of the EIGHT questions in the spaces provided in this question paper.*
- All questions carry equal marks.*
- Maximum marks for each part of a question are as indicated.*
- Relevant design tables are attached.*
- Do NOT remove any pages from this booklet.*
- Candidates should answer the questions in English.*

For Examiner's Use Only

Question	1	2	3	4	5	6	7	8	TOTAL SCORE
Candidate's Score									

This paper consists of 20 printed pages.

Candidates should check the question paper to ascertain that all the pages are printed as indicated and that no questions are missing.

1. (a) State **three** advantages of the following connections:

- (i) Bolted connections;
- (ii) Welded connections.

(6 marks)

(b) Figure 1 shows a bolted connection required to transmit a tensile force of 250 kN. Check the adequacy of the joint in terms of:

- (i) Tensile stress in plates;
- (ii) Tensile stress in angles;
- (iii) shear stress in bolts;
- (iv) Bearing stress in angles.

(14 marks)

Take the area of an 89 x 76 x 7.8 mm angle to be 12.35 cm².

Permissible tensile stress = 155 N/mm²

Permissible shear stress = 80 N/mm²

Permissible bearing stress = 250 N/mm²

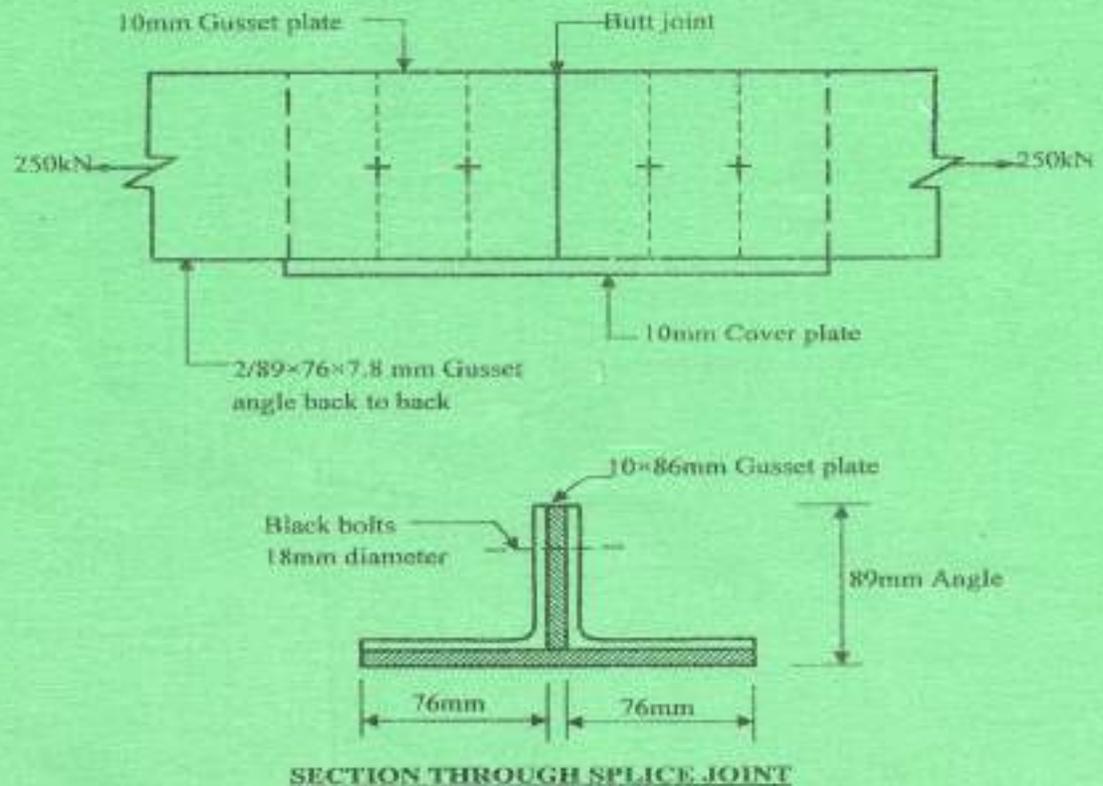


Fig. 1

2. (a) State **four** advantages of casing a steel section. (4 marks)
- (b) A universal column used as an edge stanchion in a multi-storey building has an actual length of 3.6 m centre to centre of floor beam. The loading in the beam is as shown in figure 2. Design the stanchion as an encased column in Grade 43 steel, using the tables provided. (16 marks)

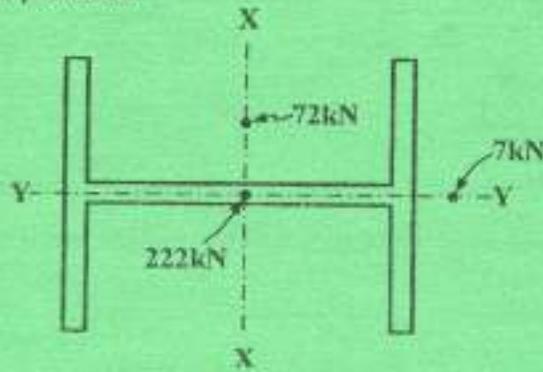


Fig. 2



3. (a) Define the following terms as used to structure timber:
- Basic stress;
 - Green stress;
 - Grade stress.
- (b) A solid timber column of 200 mm x 150 mm and of strength of class 50 s is 4 m long. It is restrained in position and direction at both ends and is required to carry an axial load of 85 kN. Check the adequacy of the column.

- Table 9 BS 5268
- Grade stress parallel to grain = 8.7 N/mm²
- Eminimum = 7.1 N/mm²
- $K_y = 1.25$, $K_g = 1.0$, for medium duration.

(17 marks)

4. Using the moment distribution method, analyse the beam in figure 3 and sketch the bending moment diagram, indicating all critical values. (20 marks)

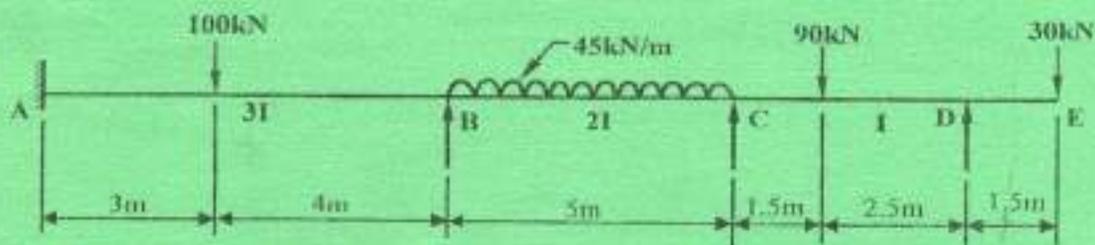


Fig. 3

5. Using the three moment theorem, analyse the beam shown in figure 4 and hence sketch the shear force and bending moment diagrams, indicating values at all critical points. (20 marks)

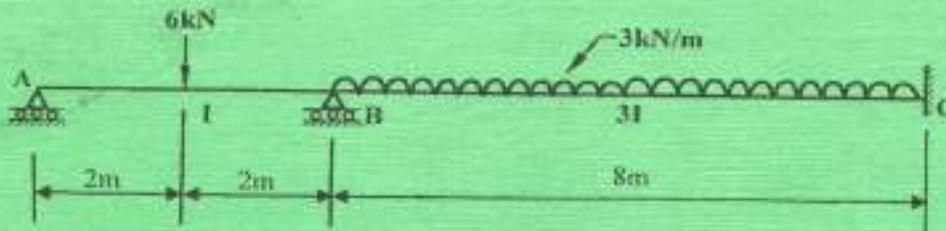


Fig. 4

6. Analyse the frame in figure 5 using moment of distribution method and then plot bending moment diagram, showing the values at all critical points. (20 marks)

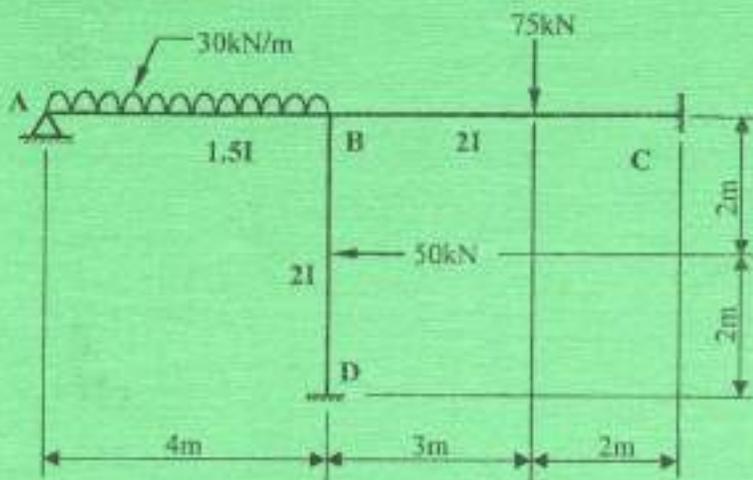


Fig. 5



7. (a) Figure 6 is a simply supported universal beam loaded as shown. Using the data provided below, check if a 533 x 165 x 73 kg/m UB will be satisfactory and hence check for shear and deflection.

Data

- Live loads = 75% of point load
- Compression flanges fully restrained
- $P_y = 100 \text{ N/mm}^2$
- $E = 210 \text{ KN/mm}^2$

(9 marks)

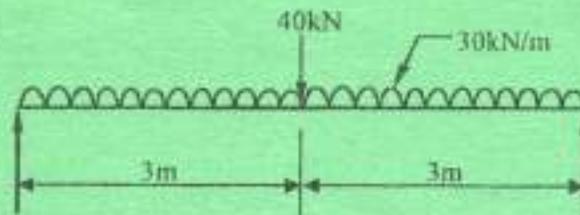


Fig. 6

- (b) (i) Sketch any two butt welds.
- (ii) Design the connection in figure 7 shown using balanced weld design. (11 marks)

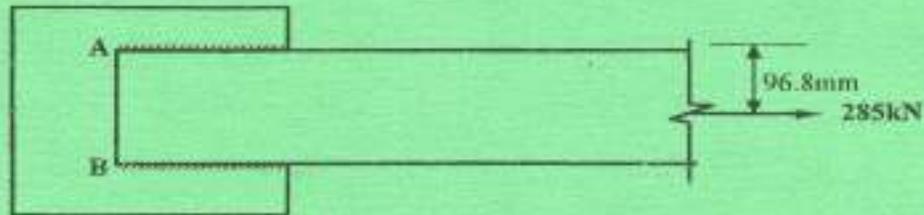


Fig. 7


8. (a) State five properties of structural timber as a construction material. (5 marks)
- (b) A timber having a clear span of 6.0 m is suspended on 250 mm bearing at each end. The beam carries a uniformly distributed load of 15 kN/m over the entire span.

Design the beam using the following information:

- Permissible deflection = span/300
- Permissible shear stress = 1.2 N/mm²
- Depth of section is twice the breadth
- Young's modulus of elasticity, E = 8 kN/mm²

(15 marks)





UNIVERSAL COLUMNS
Parallel Flanges

DIMENSIONS AND PROPERTIES

Serial No.	Depth of Flange	Area of Flange	Area of Web	Area of Column	Elastic Modulus	Avg. 2-2	Avg. 3-3	Avg. 4-4	Moments of Inertia			I _{xx}	I _{yy}	I _{zz}	
									Axis 1-1	Axis 2-2	Axis 3-3				
380 x 400	704	474.7	424.6	48.0	30.2	15.2	200.1	200.1	200.1	809.1	701.8	200.1	200.1	200.1	809.1
	701	455.7	419.5	76.0	27.0	15.2	200.1	200.1	200.1	791.8	200.1	200.1	200.1	200.1	791.8
	401	436.0	412.4	14.5	23.0	15.2	200.1	200.1	200.1	595.5	200.1	200.1	200.1	200.1	595.5
	202	415.1	407.0	17.6	20.7	15.2	200.1	200.1	200.1	500.9	200.1	200.1	200.1	200.1	500.9
	100	406.4	403.0	78.1	17.5	15.2	200.1	200.1	200.1	437.2	200.1	200.1	200.1	200.1	437.2
300 x 300	207	264.7	260.2	48.0	30.2	15.2	200.1	200.1	200.1	440.9	260.2	200.1	200.1	200.1	440.9
	107	247.0	244.6	68.0	30.2	15.2	200.1	200.1	200.1	371.8	244.6	200.1	200.1	200.1	371.8
	7	216.7	214.4	76.0	27.0	15.2	200.1	200.1	200.1	287.8	214.4	200.1	200.1	200.1	287.8
	177	208.2	207.1	14.5	23.0	15.2	200.1	200.1	200.1	235.7	207.1	200.1	200.1	200.1	235.7
	109	202.0	202.0	17.6	20.7	15.2	200.1	200.1	200.1	195.2	202.0	200.1	200.1	200.1	195.2
200 x 200	107	161.8	158.2	48.0	30.2	15.2	200.1	200.1	200.1	266.8	158.2	200.1	200.1	200.1	266.8
	7	152.4	152.4	68.0	30.2	15.2	200.1	200.1	200.1	200.2	152.4	200.1	200.1	200.1	200.2
	240	137.5	137.5	76.0	27.0	15.2	200.1	200.1	200.1	158.2	137.5	200.1	200.1	200.1	158.2
	180	128.2	128.2	14.5	23.0	15.2	200.1	200.1	200.1	128.2	128.2	200.1	200.1	200.1	128.2
	168	127.2	127.2	17.6	20.7	15.2	200.1	200.1	200.1	116.8	127.2	200.1	200.1	200.1	116.8

UNIVERSAL COLUMNS
Parallel Flanges

DIMENSIONS AND PROPERTIES

Serial No.	Depth of Flange	Area of Flange	Area of Web	Area of Column	Elastic Modulus	Avg. 2-2	Avg. 3-3	Avg. 4-4	Moments of Inertia			I _{xx}	I _{yy}	I _{zz}
									Axis 1-1	Axis 2-2	Axis 3-3			
380 x 400	704	2761.40	2430.78	880.07	16.8	11.0	1500.2	403.2	8.2					
	701	2270.23	2002.12	828.65	18.0	10.8	908.4	395.1	6.0					
	401	1031.15	1610.01	873.05	17.8	10.7	835.8	328.5	7.8					
	146	146.15	1201.88	854.10	11.1	10.5	702.4	272.3	6.0					
	132	132.474	1078.07	809.10	10.4	10.4	607.7	273.5	5.5					
300 x 300	207	926.1	878.49	887.14	10.5	10.3	504.0	194.0	10.2					
	107	791.0	674.4	710.09	10.2	10.2	433.3	187.0	12.4					
	7	682.7	519.06	680.32	10.0	10.0	356.0	148.0	10.8					
	177	617.50	407.58	604.70	15.0	9.32	279.1	110.0	15.6					
	109	482.20	422.50	474.70	15.0	9.46	269.1	143.0	13.5					
200 x 200	107	402.46	350.92	445.56	15.0	9.20	229.4	103.4	20.2					
	7	287.7	228.27	246.45	14.8	8.20	427.4	152.5	8.3					
	240	161.77	128.27	142.39	14.5	8.4	764.1	127.2	8.4					
	180	90.82	46.95	162.30	14.2	8.02	291.1	103.4	10.8					
	168	88.74	37.66	120.14	13.8	7.89	220.8	86.32	12.1					

Note: One hole is deduced from each flange under 200mm web depth (if any) as per code from each flange 30mm and one (small) hole is deducted from the top flange of the same.



TABLE 2

Serial Size	Mass per meter	Depth of Section D	Width of Section B	Thickness			Root Radius r	Depth Section E	Area of Section cm ²
				Web t	Flange T	Stem t			
910 x 470	388	920.5	420.5	21.5	28.0	24.1	701.2	430.8	
	343	811.4	418.5	19.4	22.0	24.1	791.2	420.3	
	380	828.8	307.8	18.0	22.0	13.1	415.2	369.2	
	338	818.8	305.5	17.2	22.8	13.1	419.2	362.8	
	326	810.3	307.7	18.5	22.8	13.1	415.2	364.8	
914 x 308	201	302.0	302.4	18.2	20.2	12.1	400.2	358.1	
	228	350.2	282.8	18.1	20.8	11.8	380.4	388.4	
	194	252.4	292.4	14.7	21.7	11.8	388.4	348.4	
	192	247.8	287.8	14.0	18.8	11.8	388.4	322.2	
	187	248.8	288.0	15.8	25.4	10.8	461.2	350.4	
782 x 287	172	782.0	128.7	14.8	17.8	10.8	408.8	220.1	
	147	752.8	128.9	12.9	17.8	10.8	481.2	182.2	
	110	692.8	258.8	14.8	23.7	12.2	410.8	210.2	
	142	887.4	203.7	13.2	21.0	12.2	410.8	182.4	
	120	872.8	288.0	11.7	24.2	12.2	410.8	150.4	
808 x 224	228	823.0	311.8	18.8	31.4	18.8	421.8	302.2	
	178	617.2	307.2	14.1	20.0	16.5	401.8	227.2	
	148	609.2	304.8	11.8	19.7	16.2	401.8	188.2	
	140	611.0	230.1	13.1	22.1	12.7	462.1	178.2	
	125	611.8	228.2	11.8	19.6	12.7	462.1	150.2	
610 x 228	113	607.2	227.8	11.2	17.2	12.7	462.1	144.2	
	101	602.2	227.8	10.8	14.8	12.7	462.1	128.0	
	81	602.8	178.4	10.8	12.8	12.7	547.1	104.4	
	81	598.2	177.8	10.1	12.8	12.7	547.1	104.4	
	712	584.1	233.8	18.7	27.8	14.8	480.1	388.8	
528 x 209	180	588.2	231.7	14.8	26.0	14.8	480.1	241.2	
	187	582.8	230.2	13.4	22.0	14.8	480.1	212.1	
	122	544.6	211.8	12.8	21.2	12.7	472.7	188.8	
	108	638.8	210.7	11.8	19.8	12.7	472.7	150.4	
	101	638.1	210.1	10.8	19.8	12.7	472.7	129.1	
528 x 165	82	528.2	283.7	9.8	19.2	12.7	472.7	104.2	
	72	528.8	185.4	9.2	13.8	12.7	478.5	82.2	
	88	524.8	185.1	8.8	12.8	12.7	478.5	82.2	
	88	481.4	182.8	11.4	19.4	10.2	404.4	108.2	
	88	481.6	182.0	10.8	17.1	10.2	404.4	108.2	
487 x 121	52	480.2	181.2	8.8	14.8	10.2	404.4	104.4	
	52	481.2	180.5	8.1	14.8	10.2	404.4	94.8	
	74	481.2	180.5	8.1	14.8	10.2	404.4	94.8	
	61	482.8	180.8	8.8	12.7	10.2	404.4	85.4	



UNIVERSAL BEAMS

DIMENSIONS AND PROPERTIES

Serial Size	Moments of Inertia			Radius of Gyration			Elastic Modulus			Stain D _y
	Axis	Axis	Axis	Axis	Axis	Axis	Axis	Axis	Axis	
914 x 470	717320	829177	47481	28.1	32.7	15000	2021	26.2		
	812388	889928	30221	27.8	31.1	13681	1732	28.0		
	823781	489802	174792	27.0	32.8	10078	881.2	28.0		
	125798	422584	115117	19.8	43.3	9450	819.2	21.8		
	125798	322208	64271	18.1	40.8	8241	698.5	20.1		
914 x 308	248115	302752	9822	18.2	38.1	7777	748.1	22.2		
	219120	217151	10801	24.2	40.8	7371	728.8	21.8		
	218825	258825	8384	23.8	42.8	6823	573.8	28.1		
	245412	228867	11111	22.1	45.4	5078	482.8	24.4		
	208484	221738	7888	30.8	48.8	6229	574.4	20.1		
782 x 287	204747	188241	8218	30.8	42.8	6312	581.2	20.2		
	168828	188272	8002	30.0	41.8	4211	371.1	28.2		
	168828	188272	8002	30.0	41.8	4211	371.1	28.2		
	108842	158108	8222	28.2	42.8	4902	480.8	28.2		
	180218	157888	8288	37.8	42.8	4584	420.1	22.1		
808 x 224	127822	120128	4728	27.2	31.8	3872	317.8	28.0		
	117700	108880	3982	27.2	30.8	3472	310.8	27.8		
	207152	192202	14872	24.1	30.8	6848	381.2	10.2		
	181212	140282	10571	25.8	38.1	4801	388.8	28.2		
	124247	118222	8971	25.8	40.8	4078	358.8	28.8		
610 x 228	111872	101888	4252	28.0	48.8	3820	389.8	27.8		
	88408	82875	2878	28.8	48.0	3217	321.1	31.2		
	87280	73848	2184	24.8	47.0	2816	278.1	28.1		
	78880	68132	1888	24.2	45.4	2506	222.8	28.2		
	65370	50078	1421	20.8	34.8	1888	180.0	40.1		
610 x 178	85370	50078	1421	20.8	34.8	1888	180.0	40.1		
	58718	48078	1202	20.2	32.8	1582	158.2	48.1		
	141682	121777	18084	22.8	112.2	3185	802.2	18.8		
	128018	107082	14082	22.8	104.8	4857	669.8	21.2		
	108108	82647	12057	22.8	78.2	4081	700.2	24.8		
528 x 209	78078	68118	3208	22.1	45.4	2784	302.8	25.8		
	68018	60218	2788	21.8	44.0	2488	281.8	24.1		
	61520	58871	2512	21.8	44.1	2282	259.2	28.8		
	60738	50840	2112	21.7	43.4	2012	224.8	28.8		
	47882	42082	1828	21.8	41.8	1592	178.0	40.0		
528 x 165	40414	35783	1927	20.8	32.2	1528	124.1	29.4		
	35080	31144	1682	20.8	22.1	1207	104.8	45.0		
	40823	40404	2218	21.8	42.1	1954	202.8	23.8		
	40886	32188	1582	18.0	41.8	1787	204.2	28.1		
	31028	27088	1146	18.8	40.8	1810	182.8	28.8		
487 x 121	33326	28872	1847	18.7	42.4	1488	182.8	21.8		
	28972	28072	1528	18.8	38.8	1282	188.8	21.1		



UNIVERSAL BEAMS

DIMENSIONS AND PROPERTIES

TABLE 3:
ALLOWABLE STRESS p_c ON GROSS SECTION
FOR AXIAL COMPRESSION

d_r	p_c (N/mm ²) for grade 43 steel									
	0	1	2	3	4	5	6	7	8	9
0	155	155	154	154	153	153	153	152	152	151
10	151	151	150	150	149	149	148	148	148	147
20	147	146	146	146	145	145	144	144	144	143
30	143	142	142	142	141	141	141	140	140	139
40	139	138	138	137	137	136	136	135	135	134
50	135	134	134	133	133	132	132	131	131	130
60	130	129	129	128	128	127	127	126	126	125
70	125	124	124	123	123	122	122	121	121	120
80	121	120	120	119	119	118	118	117	117	116
90	117	116	116	115	115	114	114	113	113	112
100	113	112	112	111	111	110	110	109	109	108
110	109	108	108	107	107	106	106	105	105	104
120	105	104	104	103	103	102	102	101	101	100
130	101	100	100	99	99	98	98	97	97	96
140	97	96	96	95	95	94	94	93	93	92
150	93	92	92	91	91	90	90	89	89	88
160	89	88	88	87	87	86	86	85	85	84
170	85	84	84	83	83	82	82	81	81	80
180	81	80	80	79	79	78	78	77	77	76
190	77	76	76	75	75	74	74	73	73	72
200	73	72	72	71	71	70	70	69	69	68
210	69	68	68	67	67	66	66	65	65	64
220	65	64	64	63	63	62	62	61	61	60
230	61	60	60	59	59	58	58	57	57	56
240	57	56	56	55	55	54	54	53	53	52
250	53	52	52	51	51	50	50	49	49	48
260	49	48	48	47	47	46	46	45	45	44
270	45	44	44	43	43	42	42	41	41	40
280	41	40	40	39	39	38	38	37	37	36
290	37	36	36	35	35	34	34	33	33	32
300	33	32	32	31	31	30	30	29	29	28
310	29	28	28	27	27	26	26	25	25	24
320	25	24	24	23	23	22	22	21	21	20
330	21	20	20	19	19	18	18	17	17	16
340	17	16	16	15	15	14	14	13	13	12
350	13									
360	11									
370	8									

Intermediate values may be obtained by linear interpolation.

NOTE: For material over 40 mm thick, other than rolled I-beams or channels, and for Universal columns of thickness exceeding 40 mm, the limiting stress is 140 N/mm².

TABLE 4

Modification factor K_{12} for compression members		Value of K_{12}																			
		Values of slenderness ratio λ ($=L_e/r$)																			
		< 5	5	10	20	30	40	50	60	70	80	90	100	120	140	160	180	200	220	240	250
$F_{t,c,1}$	Equivalent L_e/r (for rectangular sections)	< 14	14	29	58	87	115	145	175	202	231	260	289	347	405	452	520	579	636	694	723
		1000	0.976	0.952	0.904	0.855	0.801	0.742	0.677	0.609	0.542	0.478	0.420	0.325	0.255	0.204	0.167	0.138	0.116	0.099	0.092
1100	1.000	0.976	0.952	0.906	0.856	0.804	0.748	0.687	0.623	0.559	0.497	0.440	0.344	0.272	0.219	0.179	0.149	0.126	0.107	0.100	
1200	1.000	0.976	0.952	0.905	0.857	0.807	0.753	0.695	0.634	0.573	0.513	0.457	0.362	0.288	0.233	0.182	0.150	0.135	0.116	0.107	
1300	1.000	0.976	0.952	0.905	0.858	0.809	0.757	0.701	0.643	0.584	0.527	0.472	0.378	0.303	0.247	0.203	0.170	0.144	0.123	0.115	
1400	1.000	0.976	0.952	0.906	0.859	0.811	0.760	0.707	0.651	0.595	0.539	0.486	0.392	0.317	0.259	0.214	0.180	0.153	0.131	0.122	
1500	1.000	0.976	0.952	0.906	0.860	0.813	0.763	0.712	0.658	0.603	0.550	0.498	0.405	0.330	0.271	0.226	0.189	0.161	0.138	0.129	
1600	1.000	0.976	0.952	0.906	0.861	0.814	0.768	0.716	0.664	0.611	0.559	0.508	0.417	0.342	0.282	0.235	0.198	0.169	0.145	0.135	
1700	1.000	0.976	0.952	0.906	0.861	0.815	0.768	0.719	0.669	0.618	0.567	0.518	0.428	0.353	0.292	0.245	0.207	0.177	0.152	0.142	
1800	1.000	0.976	0.952	0.906	0.862	0.816	0.770	0.722	0.673	0.624	0.574	0.526	0.438	0.363	0.302	0.254	0.215	0.184	0.159	0.149	
1900	1.000	0.976	0.952	0.907	0.862	0.817	0.772	0.725	0.677	0.629	0.581	0.534	0.447	0.373	0.312	0.262	0.223	0.191	0.165	0.154	
2000	1.000	0.976	0.952	0.907	0.863	0.818	0.773	0.728	0.681	0.634	0.587	0.541	0.455	0.382	0.320	0.271	0.230	0.199	0.172	0.160	

THIS IS THE LAST PRINTED PAGE.

